

Optical Splitter

GNT-FS05GRQ-4

- Total Power 250W
- 1 port Uplink
- 4 ports PoF

Product Features


- Lightning Protection:6KV
- ESD Protection:8KV

Ports Description



- ① 1000Mbps Uplink Ports
- ② 1000Mbps PoF Ports

Dimension (mm)

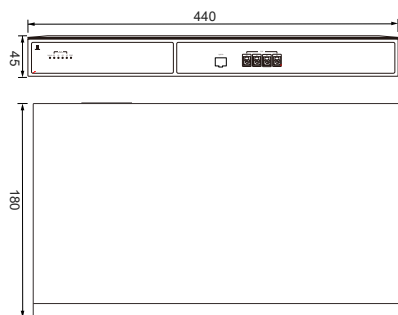

Installation Diagram



Specifications

Model	GNT-FS05GRQ-4
Ports	Uplink(1):10/100/1000Mbps uplink ports (RJ45) PoF (B1, A1~A3): 1000Mbps SCC Photoelectric composite port single-mode single-core
Transmission Rate	1000Mbps Full Duplex; 10 or 100 Mbps Half Duplex
Transmission Distance	PoF(B1, A1~A3)ports Distance/Power: 100m~250W 300m~200W 1KM~100W 3KM~30W 6KM~15W 20KM~0W
Bandwidth	10Gbps
Performance Specification	Network Latency (1 to 1000Mbps): = 16us (use the 64byte package size)
	MAC address table: 2K
	7.44Mpps Packet forwarding rate
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3ab 100BASE-TX IEEE 802.3x Flow Control
Power Support	Power Input: AC 90~240V Total≤250W
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Physical Specifications	Size(L*W*H): 440mm*180mm*45mm, Weight: 2.56KG
Working Environment	Operating Temperature: - 30°C-60°C Storage Temperature: - 30°C-60°C Operating Humidity: 10%-90% Non-condensing Storage Humidity: 5%-90% Non-condensing
Certification	CE FCC RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	Switch * 1; AC Cable * 1; User Manual * 1