GENATA

ITOONER
Idea Transmission Navigator

Extend PoE Switch


GNT-69P31
GNT-6FP32

- IP65 Water-resistant
- Dust-proof
- Insects-proof

Product Features


- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- Support bt 60W High Power
- Compact Design, Competitive Solution


Ports Description




1 100Mbps PoE Ports
2 bt 60W Power Ports
3 100Mbps Uplink Ports

Dimension (mm)



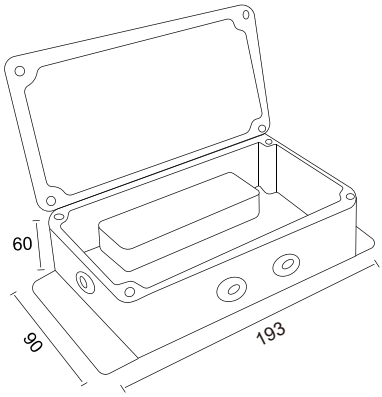

Installation Diagram



Specifications

Model	GNT-69P31 / GNT-6FP32
Ports	PoE (1):10/100Mbps PoE port (RJ45) PoE (2):10/100Mbps PoE port (RJ45),Support bt 60W High Power LAN:10/100Mbps uplink port (RJ45)
Transmission Rate	10/100Mbps: Full Duplex / Half Duplex
Transmission Distance	130m(Max Cascade 5 Times)
Performance Specification	Bandwidth:0.6Gbps
	Network Latency (10 to 100Mbps): ≦16μs (use the 64byte package size)
	MAC address table: 2K
	Packet Forwarding Rate: 0.4Mpps
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX
	IEEE 802.3x Flow Control
	IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power Input: PoE Powered by Total≤60W AI Watchdog: Port 1~2 Power Output: PoE 1 Port:1/2(+52V),3/6(GND)≤30W PoE 2 Port:1245(+52V),3678(GND) Compatible1/2(+52V),3/6(GND)≤60W
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Water-resistant Level	IP65
Physical Specifications	Size(L*W*H): 102mm*34mm*20.5mm, Weight: 0.045KG Indoor 193mm*90mm*60mm, Weight: 0.1KG Outdoor
Working Environment	Operating Temperature: -30℃~60℃
	Storage Temperature: -40℃~70℃
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE
	FCC
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	User Manual

※Specifications subject to change without notice.