

Industrial-Grade Media Converter


GNT-G922SAB

- Transmission Range: 20KM
- Transmission Rate: 100Mbps
- Power Inout: DC5V1A


Product Features

- Adapter Power Supply
- Aluminium Alloy Abrasive Material
- Convenient


Product Figure



Dimension (mm)

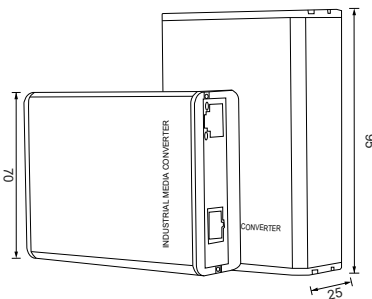

Installation Diagram



Specifications

Model	GNT-G922SAB
Protocol Standard	IEEE802.3/u
Network Interface	RJ45 10/100Mbps Self-Adaption Transmission Distance:100m
Fiber Interface	Single Mode SC Optical Fiber Type:Single Mode 9/125μm 1310T/1550R (A) / 1550T/1310R (B) Transmission Rate:100Mbps Transmission Distance:≤20KM
Performance & Specification	Forwarding Mode:Store Forward Transfer Mode:Full Duplex/Full Duplex Automatic Connection Network Latency:≤150μs
Power	Power Type:External Power Power Input:AC100V~240V 50/60Hz Power Inout:DC5V1A DC Socket:2.5x5.0mm
Physical Specifications	Size:95*70*25mm, Weight: 0.43KG
Working Environment	Operating Temperature: -30°C~75°C Storage Temperature: -10°C~55°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark FCC Part15,Class B RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual