

# Unmanaged Gigabit Switch

## GNT-G1018L


- 16 ports 1000Mbps
- 2 ports SFP
- 6KV Lightning & 8KV ESD Protection

### Ports Description




- ① 1000Mbps Ports
- ② 1000Mbps SFP Ports

### Dimension (mm)

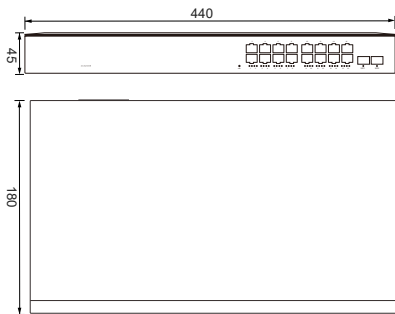

### Installation Diagram



### Specifications

Model	GNT-G1018L
Ports	(1~16):10/100/1000Mbps ports (RJ45) SFP(1~2):10/100/1000Mbps SFP ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps Half Duplex
Transmission Distance	100m
Performance Specification	Bandwidth:36Gbps
	Network Latency (10 to 1000Mbps): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 8K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port;1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x FlowControl
Power Support	Power Input: AC 90~264V 24W
Physical Specifications	Size(L*W*H): 440mm*180mm*45mm, Weight: 2.65KG
Working Environment	Operating Temperature: -30°C~60°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark
	FCC Part15,Class B
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual