

2.5G AI PoE Switch

GNT-ES14UDH2-P (Old Model: GNT-P1614ES)

- Total 120W Power Supply
- 8 ports PoE
- 4 ports Uplink
- 2 ports SFP (1G/2.5G)

Product Features


- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- Support bt 60W High Power
- Auto-Adaption 250m Transmission

Ports Description




- 1 100Mbps PoE Ports
- 2 bt 60W Power Ports
- 3 1000Mbps Uplink Ports
- 4 1000/2500Mbps SFP Port

Dimension (mm)

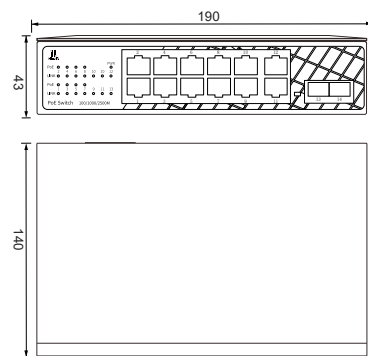

Installation Diagram



Specifications

Model	GNT-ES14UDH2-P (Old Model: GNT-P1614ES)
Ports	PoE (1~6):10/100Mbps PoE ports (RJ45) PoE (7~8):10/100Mbps PoE ports (RJ45),Support bt 60W High Power LAN(1~4):10/100/1000Mbps uplink ports (RJ45) SFP(1~2):1G/2.5G SFP ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps Half Duplex
Transmission Distance	100Mbps /10Mbps ,Auto-Adaption 250m
Performance Specification	Bandwidth:19.6Gbps
	Network Latency (1000Mbps): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 8K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port;1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x Flow Control
	IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power Input: AC 90~240V Total $\leq 120W$ AI Watchdog: Port 1~8 Power Output: PoE1~6 Port:1/2(+52V),3/6(GND) $\leq 30W$ PoE7~8 Port:1245(+52V),3678(GND) Compatible1/2(+52V),3/6(GND) $\leq 60W$
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Physical Specifications	Size(L*W*H): 190mm*140mm*43mm, Weight: 1.03KG
Working Environment	Operating Temperature: -30°C~60°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE
	FCC
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual