

L2 Lite Cloud/Web Managed Switch


GNT-G2428GF

- Total Power 12W
- RJ45 Ports * 24
- 4 ports SFP

Product Features


- Support Cloud/Web Management
- Support port 250 meters transmission (10Mbps);
- Support Port Isolation, Loop Detection/Prevention
- Support VLAN, STP, RSTP, IGMP Snooping, DHCP Snooping

Ports Description



- 1 1000Mbps Ports
- 2 1000Mbps SFP Port

Dimension (mm)

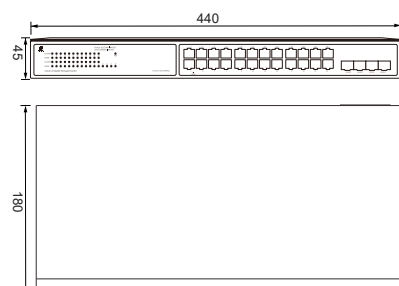

Installation Diagram



Specifications

Model	GNT-G2428GF
Port	RJ45 (1~24):10/100/1000Mbps SFP (25~28):1000Mbps
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX; IEEE 802.3ab 1000BASE-T; IEEE 802.3x Flow Control;
Web Management	Factory IP: 10.253.10.253; Default password: admin;
MAC Address Management	Support MAC Address Binding; Support MAC Address searching; Support MAC Address Learning;
VLAN	Support 802.1Q VLAN; Support Hybrid VLAN Mode;
Port Management Features	Support Port Status Display; Support Port Mirroring; Support port Speed and Duplex configuration; Support port Adaptive MDI/MDI-X; Support port Speed Limiting, Minimum 1Mbit/sec; Support port Storm Suppression; Support port 250 meters transmission (10Mbps); Support port isolation;
STP/RSTP	Support STP/RSTP
DHCP	Support DHCP Client; Support DHCP Snooping;
Security Features	Support Loopback Detection and Prevention;
Management Features	Support Web-based Management (HTTP); Support Cloud Management;
Switching Capacity	56Gbps
Packet Forwarding Rate	41.66Mpps
MAC Address Table	8K
Protection Level	Lightning Protection: 6KV; ESD Protection: 8KV;
Working Environment	Operating Temperature: 30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Power Supply	Power Input: 100~240V; Total power consumption ≤ 12W;
Physical Specifications	440mm*180mm*45mm(L*W*H)
Certification	CE; FCC; RoPS 2.0
Warranty	1-year Warranty
Package Content	Switch*1; AC Cable*1; User Manual*1